

Assembly Instructions

LOADING ROLLER ADJUSTABLE

SPACEROLL FLEX






Thank you for purchasing
your SpaceRoll flex!

Let's get it mounted on your vehicle!
Please read these instructions
carefully before starting installation
and before using the product.

It is recommended to first sort all parts,
screws, and washers by size to make
assembly easier.

Required Tools

-  1x Allen key size 5
-  2x Wrenches size 13
-  Optional: 1x Measuring tape

Assembly Time

-  Approx. 20-40 minutes



1. Preparation



Fig. 1

Lay out all parts clearly and sort the screws and washers by size.

This will make the installation much easier. (Figure 1)

2. Pre-Assemble the Brackets



Fig. 2

Place one washer onto each M8×16 button head screw. (Figure 2)

Then slide the two brackets together as shown in Figure 3.



Fig. 3

Now insert one M8×16 screw through the round holes of the brackets. (Figures 4 and 5)



Fig. 4



Fig. 5



Fig. 6

On the back side, place another washer and loosely fasten an M8 nut. (Figure 6)

Do not fully tighten the screws yet, as later fine adjustment will be required.

3. Mount the Brackets



Fig. 7

Fit each of the four M8x16 hex bolts with one spring washer and one flat washer. (Figure 7)

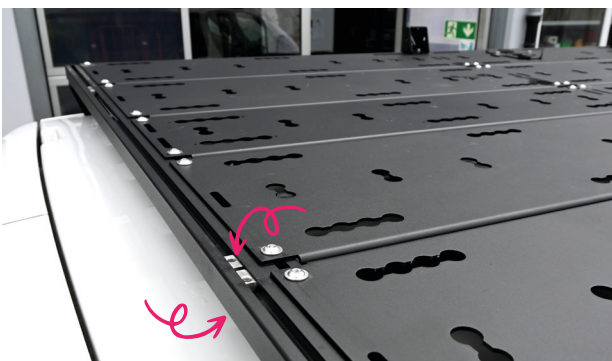


Fig. 8

Then slide or swivel the slot nuts into the rearmost slot of the carrier:

- four on the top
- four on the bottom

(Figure 8)



Fig. 9

Now position the brackets onto the carrier.

The bent edges of the brackets should point inward as shown in Figure 9.



Fig. 10

First insert the M8×16 hex bolts. (Figure 10)



Fig. 11

Then insert the M8×12 button head screws from above. (Figure 11)

At first, only tighten all screws lightly.

4● Mount the Loading Roller



Fig. 12

First place one washer onto each side of the loading roller. (Figure 12)



Fig. 13

Then insert the loading roller into the upper holes of the brackets. (Figure 13)

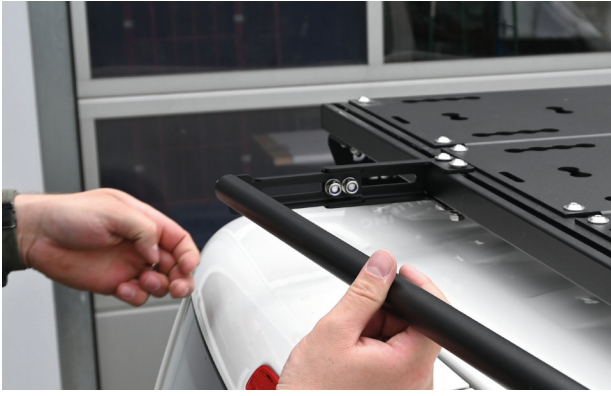


Fig. 14

On both sides, install another washer and an M8 nut. (Figure 14)



Fig. 15

Then tighten the nuts securely. (Figure 15)
Repeat the process on the other side of the loading roller.

5. Final Assembly



Fig. 16

Align both left and right brackets to the same desired measurement. (Figure 16)



Fig. 17

Then tighten the four M8x16 button head screws securely. (Figure 17)

Next, position the complete loading roller at the desired location or center it if necessary. Finally, fully tighten the four M8×12 button head screws as well as the hex bolts. (Figures 18 and 19)



Fig. 18



Fig. 19

The installation and assembly are now complete. Make sure all screws are tightened securely so your SpaceRoll Flex is mounted safely and firmly.

**Now that the wrenching is done -
get out there and explore!**

**We hope you enjoy your
SpaceRoll flex Loading Roller**

Chris & Flo



Safety Warnings

1. Risk of Life Due to Improper Installation

An incorrect installation of the roof rack system can lead to it becoming loose or detaching during travel, potentially causing serious accidents and injuries. If in doubt, have the installation performed by a professional.

2. Risk of Injury from Heavy Objects

Ensure that the roof rack system's maximum load capacity is observed when loading. Overloading can cause deformation or breakage of the rack, leading to dangerous situations for the driver and other road users.

3. Hazard from Loose Fastening Elements

Check before every journey that all screws and fastening elements are securely tightened. Loose parts can result in the loss of the roof rack system while driving.

4. Caution at High Speeds

Driving with a mounted roof rack system can affect the vehicle's handling, particularly at high speeds, in strong winds, and during cornering. Reduce speed as necessary and drive cautiously.

5. Risk Due to Increased Vehicle Height

Be aware that the mounted roof rack system increases the vehicle's height. Underpasses, garages, and other low-clearance areas may pose a hazard. Always check the clearance height before entering such areas.

6. Risk of Falling During Installation

There is a risk of falling during the installation of the roof rack system, particularly when working at a height or on a ladder. Always use stable ladders and ensure a secure stance to prevent falls and injuries.

7. Slipping Hazard When Wet

In wet or damp conditions, the surface of the roof rack can become slippery, increasing the risk of falling. Proceed cautiously when working in wet weather or on a damp surface, and wear non-slip footwear.

8. Caution: Risk of Injury During Installation

Be mindful of sharp edges and heavy components during installation. Wear protective gloves if necessary and ensure that no parts fall on people or objects.

9. Hazard Due to Product Modifications

Modifications or structural changes to the roof rack system are strictly prohibited. Alterations can compromise the safety and stability of the system and will void any warranty and liability.

Please follow all safety instructions carefully to avoid risks and hazards.

Important Notes

The installation guide serves as a support for the installation of the roof rack system. All steps and instructions have been carefully prepared and reviewed to ensure error-free installation. However, we accept no liability for damages resulting from improper installation, use, or modification of the product. Please observe the following important instructions:

1. Professional Installation

Installation should be carried out by a qualified person or a professional service provider. Improper installation may result in damage to the vehicle, personal injury, or damage to the load.

2. Regular Inspections

Regularly check the fastening elements, especially after long journeys or trips on uneven terrain. Any loose parts must be tightened immediately.

3. Load Limit

Pay attention to the maximum permissible load of the roof rack and the recommendations of the vehicle manufacturer. Overloading may cause damage to the vehicle and the roof rack system.

4. Modifications to the Product

Any modification or alteration to the roof rack system is prohibited and may impair the functionality and safety of the product. In such cases, any warranty or liability from the manufacturer will be void.

5. Disclaimer

The use of the roof rack system is at your own risk. The manufacturer and distributor accept no responsibility for damages or injuries resulting from improper installation, misuse, or failure to comply with safety instructions.

By installing and using this product, you accept the above terms and conditions.